

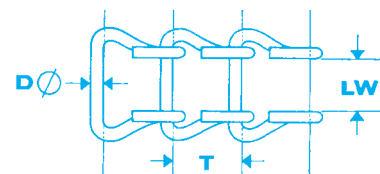

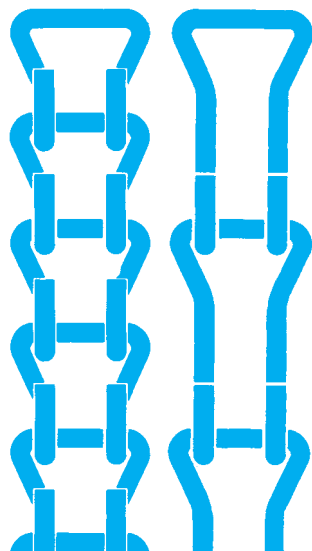


Druh č.	260NK	260	1P	315	330	336
d (mm)	1,0	1,0	1,2	1,8	2,0	2,3
t (mm)						
Vnější šířka (mm)						
Zatížení – ocel (N)	90	90	100	250	270	300
Zatížení – mosaz (N)						
Dodáváno v	FE/MS/X	FE/X	FE/MS/X	FE/MS/X	FE/MS/X	FE/MS/X
Hmotnost 100 m (kg)	3,7	4,0	5,2	10,4	14,1	18,7

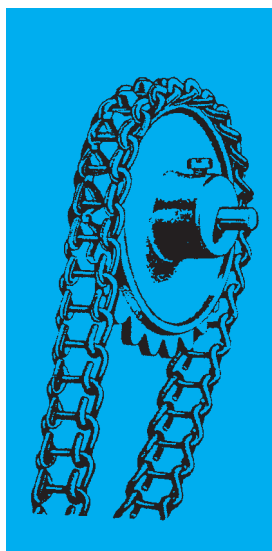

Obj.č.	Síla drátu D	Šířka LW	Rozteč T	Hmotnost 100m (kg)	
				ocel	mosaz
260NK	0,9	2	4,2 - 4,8	2,6	2,8
260NK	1,0	2	4,2 - 4,8	3,4	3,7
260	0,9	3	4,9 - 5,5	2,8	3,0
260	1,0	3	4,9 - 5,5	3,7	4,0
1P	1,2	3,5	6,0 - 8,0	4,7	5,2
315	1,7	5 - 6	9,5 - 10,5	9,5	10,4
330	2,0	6,5	9,5 - 10,5	12,8	14,1
336	2,3	6,5	11,0 - 13,0	17,0	18,7
340	2,4	7	11,0 - 13,0	18,4	20,0

Druh č.	340	200
d (mm)	2,4	2,0
t (mm)		
Vnější šířka (mm)		
Zatížení – ocel (N)		
Zatížení – mosaz (N)		
Dodáváno v	FE/MS	FE/X
Hmotnost 100 m (kg)	20,0	9,6

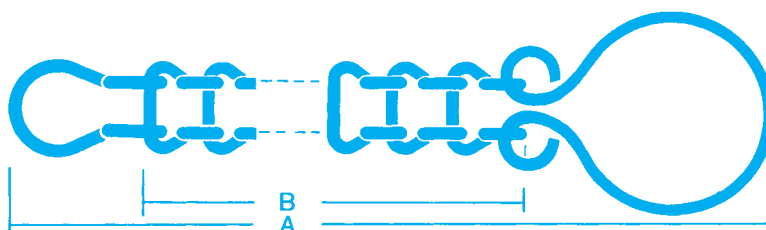

Materiál: FE = ocel, MS = mosaz, X = nerez, CU = měď, AL = hliník, P = plastická hmota

Uvedené zboží je bez atestu.